

Autoblipper Honda CRF1000L/L2, CRF1100L Africa Twin from 2017-


Manual for activating the quickshifter and blipper (plug and play)

Application: Honda CRF1000L/L2 2017, 2018 and 2019.

Needed: Cordona GP ASG Evo Superbike 430

Included in the item 430Evo kit;

GP ASG Superbike Quickshifter – Blipper	1x
99mm aluminium rod	1x
Left studs/pin bolts	2x
Right stud/pin bolt	1x
Left nuts	3x
Right nut	1x
Cable ties	4x

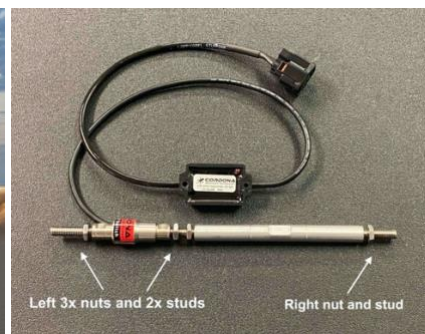

Pic 1. Cordona rod linkage



Wire Service plug

1. Pre assembly the new Cordona sensor linkage according to Picture 1
2. Measure your height on the gear lever before remove from bike
3. Follow installation manual for OEM Quick Shifter P/N 08U70-MKK-D00 at <https://www.access-honda.com/upload/files/08U70-MKK-D00.pdf> for installation and activation of quickshifter and autoblipper function.
Battery (-) negative cable needs to be disconnected.
Jump service red plug with a wire, see photo.
4. Install the Cordona GP ASG instead of OEM Quick Shifter and adjust rod linkage length to preferred gear lever height. Tighten nuts.
The led on the load cell module shall flash 2 times when bike ignition is turned ON. The units come with pre-configured direction (2 flashes means PUSH sensor for upshift). If direction need to be changed, please check instruction video at www.cordona.net/downloads
5. Enjoy your gear shifts!